

# LOCNACELLE

SIÈGE SOCIAL : 57 THIONVILLE  
**03 82 82 55 50**

AGENCES :

LOCATION DE NACELLES ET DE CHARIOTS JUSQU'À 70 MÈTRES

• PARIS NORD  
**03 44 64 15 15**

• PARIS OUEST  
**01 30 98 58 48**

• RHÔNES-ALPES  
**04 78 97 29 06**

• MÉDITERRANÉE  
**04 42 43 59 21**


• LORRAINE  
**03 82 82 55 50** THIONVILLE  
**06 12 47 04 13** ST-AVOLD  
**06 09 05 61 36** NANCY

• CHAMPAGNE  
**03 26 88 72 86**

• ALSACE  
**03 88 48 16 16**

• LUXEMBOURG  
**+ 352 26 51 16 61**

## Nacelle **ciseaux électrique** **GS2646**

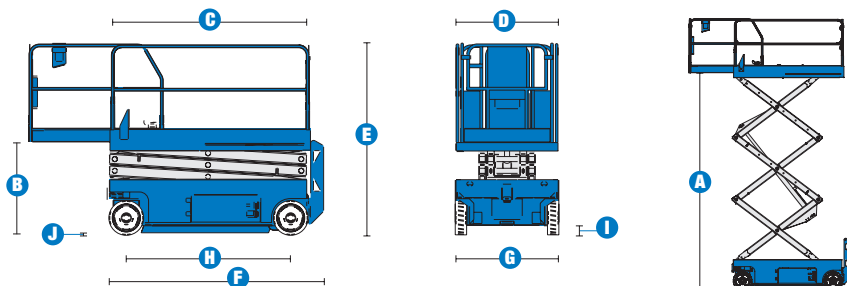

MODELS	GS™-2046		GS™-2646		GS™-3246	
	Metric	US	Metric	US	Metric	US
Working height maximum*	8.10 m	26 ft	9.92 m	32 ft	11.75 m	38 ft
<b>A</b> Platform height maximum	6.10 m	20 ft	7.92 m	26 ft	9.75 m	32 ft
<b>B</b> Platform height stowed	1.04 m	3 ft 4.8 in	1.16 m	3 ft 9.6 in	1.29 m	4 ft 2.75 in
<b>C</b> Platform length - outside	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in
extended	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in
Slide-out platform extension deck	91 cm	3 ft	91 cm	3 ft	91 cm	3 ft
<b>D</b> Platform width - outside	1.15 m	3 ft 9.3 in	1.15 m	3 ft 9.3 in	1.15 m	3 ft 9.3 in
Guardrail height	-	-	1.09 m	3 ft 7 in	1.09 m	3 ft 7 in
Toeboard height	15 cm	6 in	15 cm	6 in	15 cm	6 in
<b>E</b> Height - stowed: folding guardrails	2.13 m	7 ft	2.26 m	7 ft 5 in	2.39 m	7 ft 10 in
rails folded	1.55 m	5 ft 1 in	1.68 m	5 ft 6 in	1.80 m	5 ft 11 in
<b>F</b> Length - stowed	2.41 m	7 ft 11 in	2.41 m	7 ft 11 in	2.41 m	7 ft 11 in
extended	3.31 m	10 ft 10.5 in	3.31 m	10 ft 10.5 in	3.31 m	10 ft 10.5 in
<b>G</b> Width	1.17 m	3 ft 10	1.17 m	3 ft 10	1.17 m	3 ft 10
<b>H</b> Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
<b>I</b> Ground clearance - centre	10 cm	4 in	10 cm	4 in	10 cm	4 in
<b>J</b> - with pothole guards deployed	1.9 cm	0.75 in	1.9 cm	0.75 in	1.9 cm	0.75 in

PRODUCTIVITY						
Maximum platform occupancy (indoor/outdoor)	2/2	2/2	2/2	2/2	2/1	2/1
Lift capacity	544 kg	1,200 lbs	454 kg	1,000 lbs	318 kg	700 lbs
Drive speed - stowed	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability - stowed**	30%	30%	30%	30%	25%	25%
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in
Raise / lower speed	30 / 33 sec	30 / 33 sec	30 / 38 sec	30 / 38 sec	57 / 35 sec	57 / 35 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm 15 x 5 x 11 in		38 x 13 x 28 cm 15 x 5 x 11 in		38 x 13 x 28 cm 15 x 5 x 11 in	

POWER						
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	14.2 L	3.75 gal	14.2 L	3.75 gal	17 L	4.5 gal

WEIGHT***						
	1,974 kg	4,351 lbs	2,447 kg	5,395 lbs	2,812 kg	6,200 lbs

*Toujours plus haut, toujours plus sûr.*

